




**RHINO**<sup>™</sup>  
CARBON FIBER  
REINFORCEMENT PRODUCTS

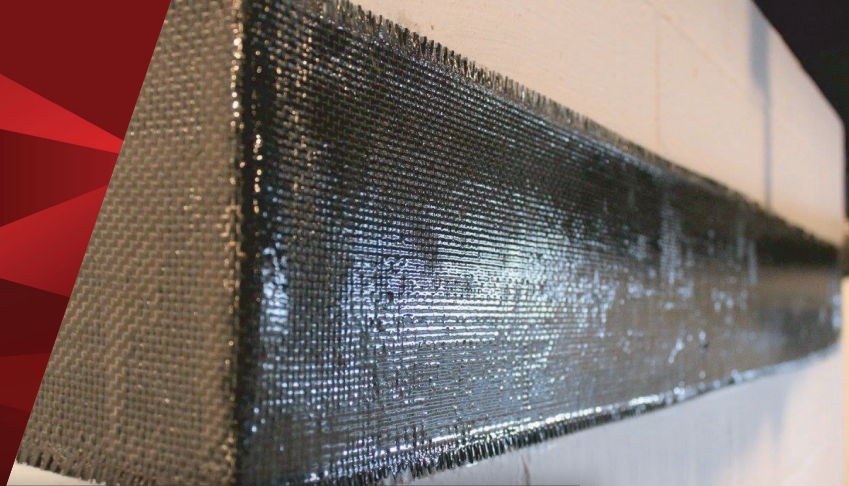

## RHINO CARBON FIBER CORNER WALL REPAIR

There are a variety of issues that cause cracked foundation wall corners, but the primary reason is that many structures have beams that pocket over the top of the corners; this type of construction has a tendency to crack due to the stress and weight of the beam. The **Rhino Carbon Fiber Corner Wall Repair Kit** not only fortifies the corners of areas that are breaking down, but can also be used as additional reinforcement for existing structures in good condition so they don't crack or move inward over time, increasing strength and stability.

### Why CFRP?

- High-Strength** – carbon fiber is 10x stronger than steel
- Easy-to-Install** – light-weight product and quick, straight-forward procedure
- Long-Lasting** – carbon fiber resists corrosion and does not degrade
- Versatile** – strengthen walls, wall openings, cracks and more
- Less Intrusive** – thin yet strong profile doesn't affect square footage

### Why Rhino Carbon Fiber?

- Sales Support for Training and Technical Assistance** – product and installation information and training
- Engineering Support for Complex Projects** – assistance with technical project requirements
- Marketing Support to Help Grow Your Business** – grow your business with sell sheets, case studies and more

**We're Here to Help!**



**400 GSM Unidirectional Corner Wall Repair Kit**



**560 GSM Bidirectional Corner Wall Repair Kit**

**Kit Includes Four Carbon Fiber Straps that are 10 Feet Long!**

**Contact us today to review our extensive line of structural strengthening products!**



1-888-684-3889



[www.rhinocarbonfiber.com](http://www.rhinocarbonfiber.com)




[info@rhinocarbonfiber.com](mailto:info@rhinocarbonfiber.com)

© Rhino Products USA, Inc. All rights reserved. RHINO CARBON FIBER and all other RHINO design marks are trademarks of Rhino Products USA, Inc.

None of the authors, contributors, administrators, or anyone else connected with Rhino Products USA Inc. or any of its affiliates (collectively, "Rhino"), in any way whatsoever, can be responsible for your use of the information, instructions or advice contained in or linked from this or any related document. All liability with respect to actions taken or not taken based on the contents of this or any related document is hereby expressly disclaimed by Rhino. The content of this document is provided "as is;" no representations are made that the content is error-free.

The carbon fiber straps should be applied 18-inches apart, on-center, to cover the entire span of the corner wall. The straps can be applied indoors or outdoors, however for outdoors the straps must be painted or coated with a finishing product to protect the carbon fiber reinforced polymer (CFRP) from UV light.

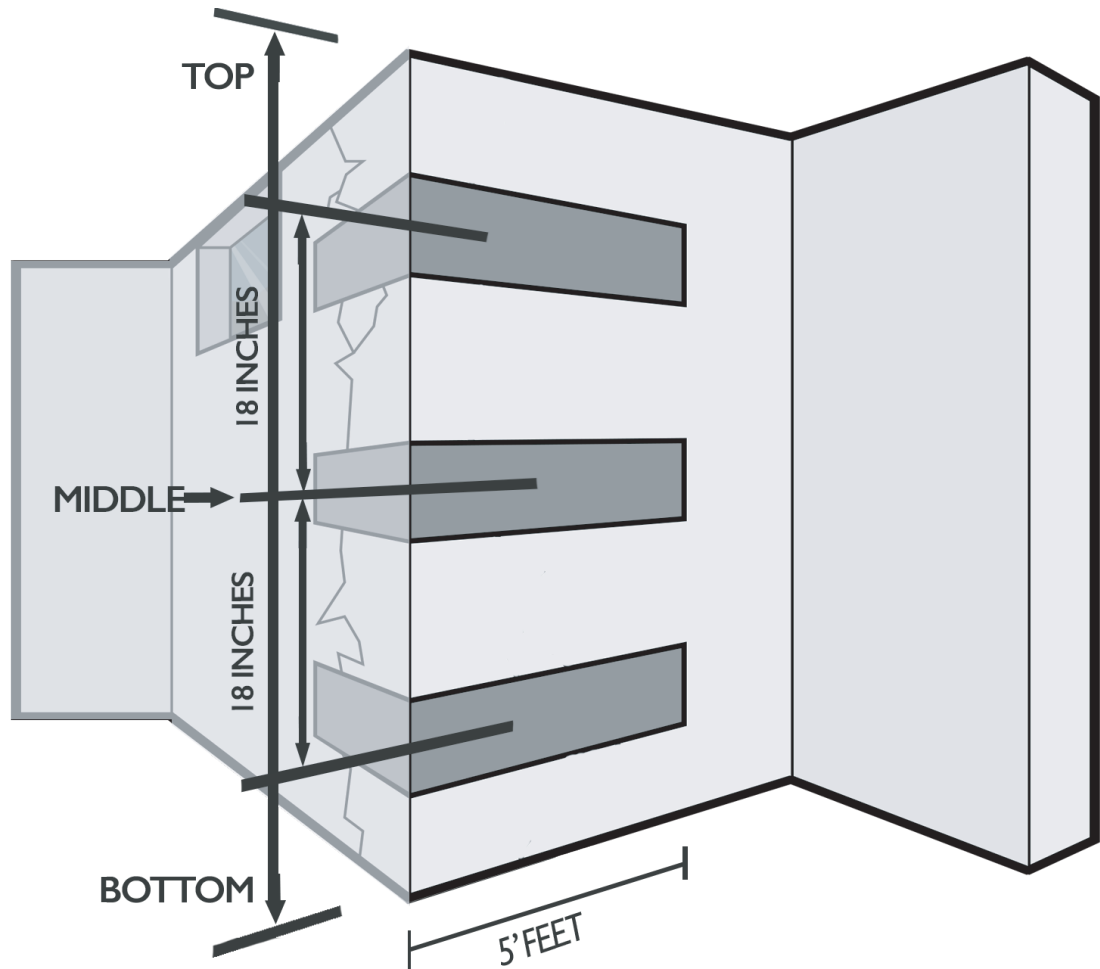

#### 400 GSM Unidirectional

COMPOSITE PROPERTIES		
Property	Imperial	Metric
Tensile Strength	150 ksi	1033.5 MPa
Tensile Modulus	10620 ksi	73.2 GPa
Tensile Elongation, %	1.40	1.40
Nominal Thickness	0.027 in	0.68 mm

#### 560 GSM Bidirectional

COMPOSITE PROPERTIES		
Property	Imperial	Metric
Tensile Strength	111 ksi	768 MPa
Tensile Modulus	6890 ksi	47.5 GPa
Tensile Elongation, %	1.60	1.60
Nominal Thickness	0.0275 in	0.70 mm

Average values of a test series conducted by an accredited 3rd party laboratory.

**Contact us today to review our extensive line of structural strengthening products!**

 1-888-684-3889

 [www.rhinocarbonfiber.com](http://www.rhinocarbonfiber.com)

 [info@rhinocarbonfiber.com](mailto:info@rhinocarbonfiber.com)

© Rhino Products USA, Inc. All rights reserved. RHINO CARBON FIBER and all other RHINO design marks are trademarks of Rhino Products USA, Inc.

None of the authors, contributors, administrators, or anyone else connected with Rhino Products USA Inc. or any of its affiliates (collectively, "Rhino"), in any way whatsoever, can be responsible for your use of the information, instructions or advice contained in or linked from this or any related document. All liability with respect to actions taken or not taken based on the contents of this or any related document is hereby expressly disclaimed by Rhino. The content of this document is provided "as is;" no representations are made that the content is error-free.